


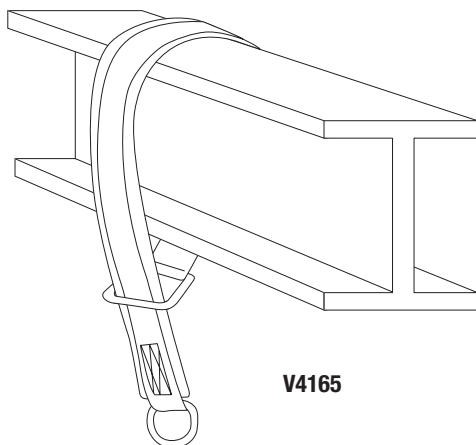

The anchor sling, wrapped around a beam, provides an anchorage attachment point capable of supporting a load of 5,000 lbs. (22.2 kN).

For abrasion protection, a webbing liner is fixed on the entire length of the sling to protect it from sharp edges and to prolong its life. Where edges are extremely sharp, it is recommended to use pads.

For further information, refer to the "Use and Maintenance Instructions" for anchor slings.

⚠ WARNING

Always select an anchorage point that is rigid and capable of supporting 5,000 lbs. (22.2 kN) per person attached.

Applicable standards

- Manufactured in accordance with ANSI, OSHA and CSA requirements.
- Meets and/or exceeds 5,000 lbs. (22.2 kN) strength requirements for anchorage point.
- Ask customer service for specific standards as federal, state, local or provincial regulations may differ.

Available models

- V4136 15-in. (0.4 m) anchor sling, rated 5,000 lbs. (22.2 kN)
- V4135 3-ft. (0.9 m) anchor sling, rated 5,000 lbs. (22.2 kN)
- V4165 6-ft. (1.8 m) anchor sling, rated 5,000 lbs. (22.2 kN)

PARTS	SPECIFICATIONS	APPLICABLE STANDARDS
Sling webbing	Polyester webbing Width: 1½ in. (45 mm) Thickness: ¼ in. (1.4 mm) Tensile strength: 5,700 lbs. (25.4 kN) Webbing is heat-cut to prevent fraying.	ANSI Z359.1-1999 CSA strength requirements
Protective webbing	Nylon webbing Width: 3 in. (76 mm) Thickness: ⅝ in. (2 mm) Webbing is heat-cut to prevent fraying.	
Stitching	Sling is lock-stitched. Threads: #207, #138 polyester	CSA Z259.12-01
D-ring single bar 3 in. (76 mm)	Plating: zinc dichromate Proof-loaded 100% at 3,600 lbs. (16 kN) Tensile strength: 5,000 lbs. (22.2 kN)	ANSI Z359.1-1999 CSA Z259.12.01
D-ring single bar 4 in. (102 mm)	Plating: zinc dichromate Proof-loaded 100% at 3,600 lbs. (16 kN) Tensile strength: 5,000 lbs. (22.2 kN)	ANSI Z359.1-1999 CSA Z259.12.01
Capacity	310 lbs. (140 kg), one person	